SPANN-BOY®

with arc segment profile

Applications

For applications with restricted free space beneath the chain. 30 mm are sufficient.

Tensioning pressure

· Choice of light or heavy spring force

Attachment

· Installed next to the chain
· Bore holes in the housing

Attachment

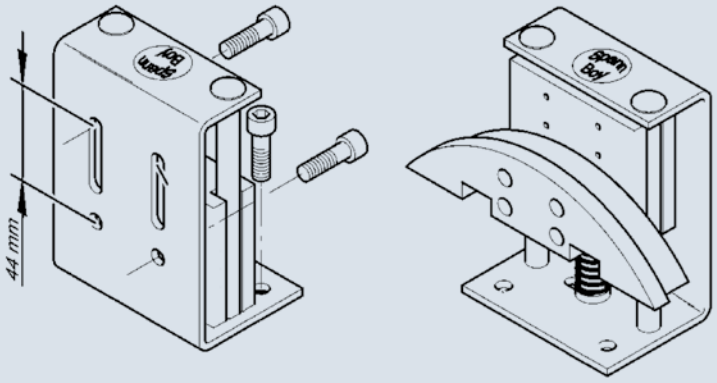

Chain no.		Chain dim. in inch	B	a	Article no. Light tension force	Article no. Heavy tension force	Article no. Heavy tension force, stainless steel
ASA/JIS	DIN 8188						
25	04C-1 (U-profile)	1/4" x 1/8"	20	10.00	291 040 001	291 040 005	292 040 005
35	06C-1	3/8" x 3/16"	20	17.90	291 040 009	291 040 010	292 040 010
40	08A-1	1/2" x 5/16"	20	16.45	291 040 002	291 040 006	292 040 006
50	10A-1	5/8" x 3/8"	20	15.75	291 040 003	291 040 007	292 040 007
60	12A-1	3/4" x 1/2"	20	14.35	291 040 004	291 040 008	292 040 008
35-2	06C-2	3/8" x 3/16"	20	7.85	291 040 017	291 040 019	292 040 019
40-2	08A-2	1/2" x 5/16"	32	15.15	291 040 018	291 040 020	292 040 021
50-2	10A-2	5/8" x 3/8"	32	10.80	291 040 021	291 040 023	292 040 023
35-3	06C-3	3/8" x 3/16"	32	9.20	291 040 022	291 040 024	292 040 024

Special designs on request

Dimensions in mm

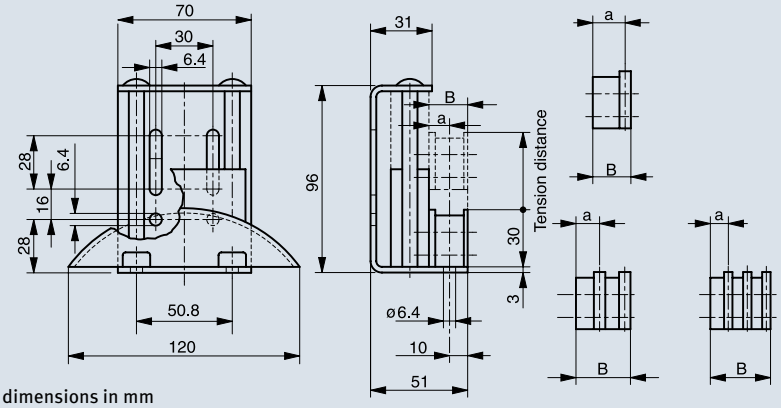

All dimensions in mm